



REINVENTING THE WHEEL END

SEVERE DUTY HUBCAP

Includes removable plug, side fill port, bolts, gasket and heat check bolt to indicate excessive temperature within the hub.


NO WINDOW KIT MEANS ONE LESS LEAK PATH

SPOKES PREVENT LENS CRACKING

REMOVABLE PLUG

THICKER FLANGE

SIDE FILL INCLUDED

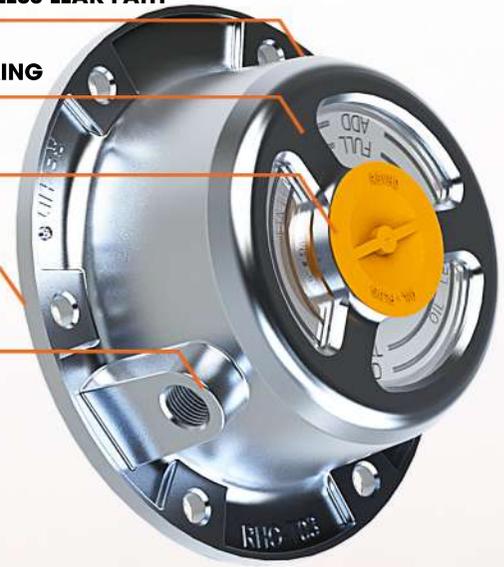

HUBCAP INCLUDES HEAT CHECK BOLT
Pops at 250°



HUB CAP CROSS REFERENCE					
		REVHD	Stemco Ending In:	SKF Ending In:	National Ending In:
Oil	Steer	RHO-S01	4024	11 or 12	024 or 024A
	TN Trailer	RHO-T03	4009 or 5009	43 or 44	009 or 009A
	TP Trailer	RHO-T04	4195	96 or 99	195 or 195A
Grease	TN Trailer	RHG-T03	340-4009, 342-4009, 340-4321, 340-5096, 340-5097		
	TP Trailer	RHG-T04	340-4195 or 4322		
PSI Oil	TN Trailer	RHO-T03PSI	343-4370, 4373 or 4350	1943 or 1443	
	TP Trailer	RHO-T04PSI	343-4372 or 4375	1996 or 1499	
PSI Grease	TN Trailer	RHG-T03PSI	340-4370 or 4350		
	TP Trailer	RHG-T04PSI	340-4372		

SPINDLE NUT CROSS REFERENCE						
	REVHD	Stemco	Axilok	Temper-Loc	Outer Bearing	Socket
FF Steer	RL-S01	448-4836	AX12-1500	614836	3782	2 1/2" - 6 pt
FE Steer	RL-S02	448-4837	AX18-1500	614837	3782	2 1/2" - 6 pt
Drive	RL-D02	449-4973	AX12-3250	614973	580	4 3/8" - 8 pt
TN Trailer	RL-T03	447-4743	AX16-2625	614743	HM212049	3 3/4" - 8 pt
TP Trailer	RL-T04	447-4723	AX12-3480	614723	HM518445	4 13/16- 8pt

Represents
1-Thousandths
end-play of
adjustment

Represents proper back-off
for a manually adjusted hub.

REV-LOC



UNIVERSAL SPINDLE
LOCKING NUT
DIAL IN PERFECTION



EasyView® Tab NOT Engaged



EasyView® Tab Engaged

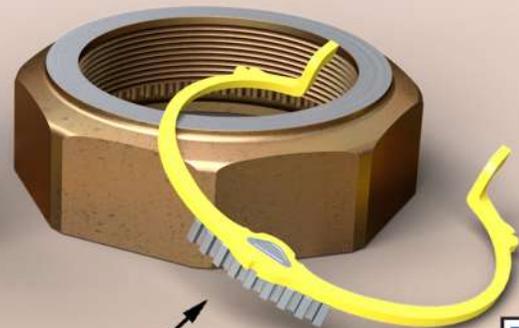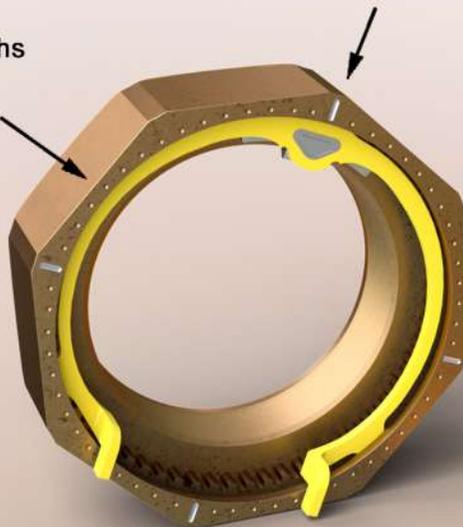

Reusable Clip

